FAX NO. 954+351+7475

#4/ @ 4/W/3

File No. 1351.01

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT:

Memran, Louis 1.

EXAMINER: Trost

SERIAL NO:

10/002, 382

ART UNIT: 2683

For:

System for utilizing vacuum tubes in computer audio-circuitry

Filed:

10/20/01

PETITION TO MAKE SPECIAL PURSUANT TO MPEP- 708.02 (II) AND 37 CFR 1.102

RECEIVED

U.S. Patent and Trademark Office Asst. Commissioner for Petitions Box DAC Washington, DC 20231

APR 1 0 2003

DIRECTOR OFFICE TECHNOLOGY CENTER 2600

Dear Sir:

This is a petition under MPEP 708.02 to make the instant application special by reason of infringement of the invention thereof.

The petition fee under 37 CFR 1.17(i) should be charged to PTO Deposit Account No. 502557. Applicant is small entity.

Also enclosed is an Opinion of Patentability and an Opinion of Infringement. which, collectively, satisfy the requirements of MPEP 708.02 (II).

Respectfully submitted, LOUIS I. MEMRAN

By Melvin K. Silverman

Reg. No. 26,234

500 WEST CYPRESS CREEK ROAD SUITE 500

FORT LAUDERDALE, FLORIDA 33309

Tel: (954) 351-7474

Enclosures: Opinion of Patentability
Opinion of Infringement

Pct. To Make Sp.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT:

Memran, Louis I.

EXAMINER: Trost

SERIAL NO:

10/002, 382

ART UNIT: 2683

For:

System for utilizing vacuum tubes in computer audio-circuitry

Filed:

10/20/01

OPINION OF PATENTABILITY

U.S. Patent and Trademark Office Asst. Commissioner for Petitions Box DAC Washington, DC 20231

Dear Sir:

Currently, solid state devices such as transistors and the like are used in IC boards for the amplification of audio signals in computer audio circuitry. Transistors are compact, cheap and reliable components. However, transistors are unable to produce an audio sound which is particularly pleasant to the human ear. In low cost digital-to-analog converters, the sound which the transistors produce is often harsh. This technology therefore does not enhance the sound quality of low cost speakers which are employed with most personal computers today. Conversely, vacuum tubes, where used at all in contemporary electronics, are employed in expensive audio systems which require transformers and ancillary vacuum tubes for their operation.

This invention provides a system and means of integrating vacuum tubes into the motherboard of a personal computer to thereby furnish, to the otherwise pedestrian speakers thereof, high quality audio characteristics.

I have caused to be effected a careful and thorough search of the art. As a result, the only art now known to the Applicant in which vacuum tubes are employed in analog-

Pet/Op of Pat.

to digital or digital-to-analog technology relate to the areas of audio processing; sound mixing, often as a part of a loudspeaker control circuit; and electric instruments.

This technology is reflected in the following:

U.S. Patent No. 5, 721, 784 (1990) to Bernardo, entitled Asymmetrical Driver for Asymmetrical Loudspeakers.

U.S. Patent No. 5,789,689 (1998) to Doidic, entitled Tube Modeling Programmable Digital Guitar Amplification System;

U.S. Patent No. 802, 182 (1998) to Pritchard, entitled Audio Process Distortion; and

U.S. Patent No. 6, 350, 943 (2002) to Suruga et. al., entitled Electric Instrument Amplifier.

A copy of the Abstract of each of the above is enclosed herewith. As may be noted therefrom, traditional vacuum tubes, where combined in some fashion with contemporary digital circuitry, relate almost exclusively to audio amplifiers and amplifiers for electric instruments, such as electric guitars. Accordingly the art does not teach a practical means of integrating a vacuum tube into a motherboard of a CPU of a personal computer having, as an effect thereof, the enhancement of the audio quality of otherwise conventional speakers associated with the personal computer.

I therefore am of the opinion that the invention, as claimed, is clearly allowable over all effective art of record.

2

Respectfully submitted LOUIS I. MEMRAN

Ву

Reg. No. 26,234

Enclosures:

Abstracts of patents set forth above

FACSIMILE COVER





MELVIN K. SILVERMAN & ASSOCS, P.C. REG. PATENT ATTORNEY

OF COUNSEL MICHAEL L SANTUCCI


MELVIN K. SILVERMAN DAVID A. HOFFMAN PHILIP A. DUVALSAINT

U,	SI	HEET'	
Bill Trost	FROM	David	Hoffman
Fax: 703-746-6083	Fax:	(954) 492-0087	
	Phone	(954) 351-7474	
RE: SN: 10/002,382	Date	4/8/03	
Number of Pages (including Transmittal Sheet			
Urgent	□ Pleasi	Reply For Info	mation
Dear Mr. Trost:			
Please have	the	correct	Examiner
call me with 4			of the
Petition ASAP.	Tho	nk you	· · · · · · · · · · · · · · · · · · ·

PATENT, TRADEMARK AND COPYRIGHT MATTERS

The information contained in this fax is confidential and covered by Attorney-Client privilege. If you receive this fax by mistake, please notify us by telephone (954 351-7474). Do not send or give this fax to any other

person.



FINA

UNITED STATES DEPARTMENT OF COMMERCE Patent and Trademark Office

Address: COMMISSIONER OF PATENTS AND TRADEMARKS Washington, D.C. 20231

MONTHLY STATEMENT OF DEPOSIT ACCOUNT

To replanish your Deposit Account, detach and return top portion with your check. Make check payable to Commissioner of Patents & Trademarks.

MELVIN K SILVERMAN, PC

500 WEST CYPRESS CREEK RD SUITE 500 FORT LAUDERDALE FL 33309

Accoun	502557
Date	2-28-03
Page '	1

PLEASE SEND REMITTANCES TO: Patent and Trademark Office P.O. Box 70541 Chicago, III. 60673

AYE	PQS	LED	CONTROL	DESCRIPTION	DOCKET NO.	FEE	CHARGES/	BALANCE
0.	DAY	YR.	NO.	(Serial, Patent, TM, Order)	500.12	CODE	CREDITS	
2	12	03	3	76487902	014438.2	6001	335.00	49665.0
2	12	03	21	10042709	1043.06.2	2001	375.00	49290.0
2	12	03	22	10042709	1043.06.2	2051	65.00	49225.0
2	13	03	20	10158258	1328.02	8021	40.00	49185.0
2	14	03	1	09733791	1282.02	2251	55.00	49130.0
2	14	03	253	PCT/US02/29150	1238.02.1	1605	490.00	
2	14	03	254	PCT/US02/29150	1238.02.1	1705	146.00	
2.]	14	03	255	PCT/US02/32001	1238.03.1	1605	490.00	48004.0
2	14	03	256	PCT/US02/32001	1238.03.1	1705	146.00	
2	44	03	294	PCT/US02/32002	1238.06 (PCT	1605	490.00	47368.0
2	14	03	295	PCT/US02/32002	1238.06 (PCT	1705	146.00	47222.0
2	20	03	8_	10002382	765	1460	130.00	
2	20	03	163	09851995	1245.02	2402	160.00	
2	20	03	164	09851995	1245.02	2253	465.00	
2	21	03	13	09626641	1243.05	2501	650.00	
2	21	03	14	09626641	1243.05	8001	15.00	
2	21	03	15	09882331	1288.02	2501	650.00	
2	21	03	16	09882331	1288.02	1504	300.00	
2	21	03	17	09882331	1288.02	8001	15.00	
2	21	03	18	60445227	1330.02	2005	80.00	
2	21	03	23	09932958	1070.15.3	2501	650.00	
2	21	03	24	09932958	1070.15.3	1504	300.00	
2	21	03	25	09932958	1070.15.3	8001	15.00	
2	21	03	76	10367903	1040.14	2001	375.00	
2	21	03	132	PCT/US03/04296	571.09.1(PCT	1601	240.00	
	21	03	133	PCT/US03/04296	571.09.1(PCT	1603	450.00	
2	21	03	134	PCT/US03/04296	571.09.1(PCT	1702	407.00	
2	21	03	135	PCT/US03/04296	571.09.1(PCT	1703	126.00	
2	21	03	136 11	PCT/US03/04296	571.09.1(PCT	1707	440.00	
$\frac{2}{2}$	24	03	12	5391184		2552	1025.00	
2	25	03	79	5391184 60448171	1010 00	2555	65.00	
2	25	03	251	PCT/US01/29277	1319.02 1065.08.1	2005 1705	80.00	
2	25	03	253	PCT/US01/29277	1065.08.1		9.00	
		03	200	PCT/US01/292/7		1619	292.00	
		03	2	PCT/US02/38532	1354.01 1354.01	1602 1703	700.00 360.00	
-1	201	<u> </u>	<u>-</u>		BALANCE TOTAL C		TOTAL CREDITS	CLOSING BALANC

AN AMOUNT SUFFICIENT TO COVER ALL SERVICES REQUESTED MUST ALWAYS BE ON DEPOSIT.

*** O.D. INDICATES OVERDRAWN

Received from < 954+351+7475 > at 4/8/03 11:34:38 AM [Eastern Daylight Time]



United States Patent (19)

Bernardo

Patent Number:

5,721,784

Date of Patent:

Feb. 24, 1998

(54)	ASYMMETRICAL DRIVER FOR ASYMMETRICAL LOUDSPEAKERS		
[76]	· Inventor:	Carmelo F. Bernardo, 12 Street, Lakandula, Angeles City, Philippines	

[21] Appl. No.: 593,884 [22] Filed: Jan. 30, 1996 H04R 1/02 Int. Cl. 381/89; 381/59 [52] U.S. Cl. 381/96, 89, 59, [58] Fleid of Search . 381/61

References Cited [56]

H.S. PATENT DOCUMENTS


	+		
2,313,098	3/1943	Shepard, in .	
3.047.661	7/1962	Winker.	
4.207,430	6/1980	Harada et al	
4.260,954	4/1981	Crooks .	
4.276,443	6/1981	Mayers .	
4.340,778	7/1982	Cowans et al	
4.809.336	2/1989	Princhard	381/61
4,821,328		Drozdowski .	
4,908,870	3/1990	Nagi	381/59
4,995,084	2/1991	Prichard	381/61
5,430,802	7/1995	Page .	
5,542,001		Reifia	381/96
- p,			

Primary Examiner—Curtis Kuntz Assistant Examiner—Vivlan Chang Attorney Agent, or Firm-Schweitzer Comman Gross & Bondell LLP

ABSTRACT

An audio output system, having loudspeakers with an asymmetrical output in response to symmetrical modulated input signals, is provided with a unidirectional limiting circuit for proportionally reducing input signals of a polarity to drive the loudspeaker in the direction of its greatest response. In its basic form, the limiting circuit is a voltage limiting circuit, preferably a voltage divider, which includes a rectifier device. When the driving signal is of a polarity to produce a greater response from the loudspeaker, the rectifier device conducts and the magnitude of the signal voltage is reduced, resulting in substantially greater uniformity of output response of the loudspeaker in both directions. When the limiting circuit is placed on the input side of the power amplifier, the rectifier device advantageously is a vacuum tube connected as a diode. When located in the output stages of the power amplifier, where higher signal voltages are available, solid state rectifier devices may be employed. Multiple asymmetrical loudspeakers may be controlled using a single limiting circuit, provided all such loudspeakers are connected so that their greater response results when the signal thereto is of the same polarity.

9 Claims, 5 Drawing Sheets

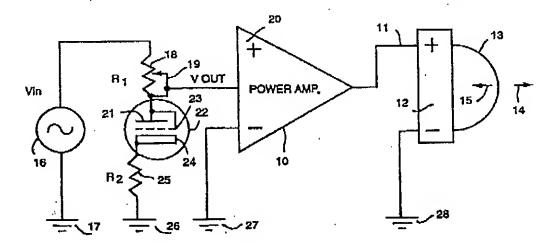



United States Patent 1191

Doidic et al.

Patent Number:

5,789,689

Date of Patent:

Aug. 4, 1998

[54] TUBE MODELING PROGRAMMABLE DIGITAL GUITAR AMPLIFICATION SYSTEM

[76] Inventors: Michel Doldie, 7611 Truxton, Los Angeles, Calif. 90045; Michael Mecca. 1210 Appleton Way, Venice, Calif. 90291; Marcus Ryle. 2167 W. Ridge. Los Angeles, Calif. 90049; Curtis Sentiner, 1433 17th St. #2. Sta. Monica. Calif. 90404

[21] Appl. No.: 785,004

[22] Filed: Jan. 17, 1997

G10H 1/02; G10H 7/12; [51] Int. Cl. HO3F 19/00; HO3M 1/62

84/603; 84/607; 84/621; 84/629; 84/630; 84/631; 84/633; 341/138; 381/138; 381/120

84/601, 602-607. [58] Field of Search 84/621, 626-633, 662-665; 330/10, 251; 381/111, 116-118, 120; 379/100; 341/138-140

[56]

References Cited

U.S. PATENT DOCUMENTS

3.357.291	12/1967	Carmichael
3.524.143		Munch, Jr 330/30
3.539.699	11/1970	Johnson 84/1.16
3,683,293	\$/1972	Matsui 330/3!
3,835,409		Laub
4,151,477	4/1979	Yokoyama
4.175.462	11/1979	Simon 841.16
4,194,165		Skulski 252/255
4,211,493		Smith 179/1
4.251,688		Furner
4,495,640	1/1935	Frey 381/61

(List continued on next page.)

OTHER PUBLICATIONS

Dattotro. Jon. 'The Implementation of Recursive Digital Filters for High-Fidelity Audio." Journal of the Audio Engineering Society, 36:11 (1988). Hirata. Yoshimutsu, "Digitalization of Conventional Analog Filters for Recording Use." Journal of the Audio Englneering Society. 29:5 (1991).

Line 6. AxSys 212 User Manual 1996. Moorer, James A., "About This Reverberation Business",

Moote, James A. Computer Music Journal, 3.2 (1979).
Oppenheim and Schaefer. "Allpass Systems". Discrete-Time Signal Processing. pp. 234-240. (Frentice-Hall

Opponheim and Schaefer. "Filter Design Technique". Discrete-Time Signal Processing, pp. 403-513. (Prentice-Hall

Proakis and Manolakis. "Random Number Generators",

Digital Signal Processing. B6. (Prentice-Hall. 1996). Proakis and Manolakis, "Design of Digital Filters", Digital Signal Processing, pp. 614-737. (Prentice-Hall. 1996).
Regallia et al., "The Digital All-Pass Filter: A Verstatile Signal Processing Building Block". Proceedings of the IEEE, 76:1 (1988).

Roland, Guital Preamp/Processor GP-100 Owners Manual 1995.

Roland, Guitar Preamp/Processor GP-100 Advertisement 1995.


Stauner and Puckett, "Designing Multi-Channel Reverberators." Computer Music Journal. 6:1 (1982). Wilson Rhonda "Filter Topologies". Journal of the Audio Engineering Society, 41:9 (1993).


Primary Examiner-Stanley I. Witkowski Attorney, Agent, or Firm-Finnegan. Henderson, Farabow. Garrett & Dunner, LLP

ABSTRACT

An electric quitar amplifier which utilizes a digital signal processor to produce vocuum-tube-like distortion without certain unwanted audio artifacts created by previous digital realizations of nonlinear high-gain functions. By virtue of a microprocessor-controlled digital signal processor embodiment, the invention gives the user programmable control over parameters normally associated with state of the art guitar amplifiers (e.g. tone controls, reverb controls, tremolo controls, etc.), as well as other musically useful parameters which are not normally included among the controls of a guitar amplifier (e.g. selection of preamp type. autovolume, reverberation type, autowah, etc.).

45 Claims, 18 Drawing Sheets

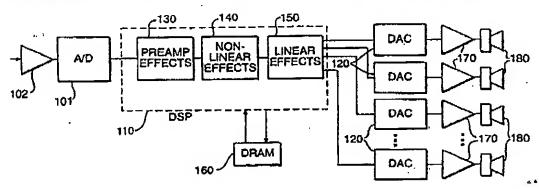



US005802182A

United States Patent [19]

Pritchard

[56]

Patent Number:

5,802,182

Date of Patent: [45]

Sep. 1, 1998

[54] AUDIO PROCESS DISTORTION

[76] Inventor: Eric K. Pritchard, Rtc. 1 Box 536, Berkeley Springs, W. Va. 25411

[21] Appl. No.: 759,128

[22] Filed: Dec. 2, 1996

Related U.S. Application Data

[63]	Continuation-in-part of Ser. No. 231,019, Jul. 27, 1994.
	Int. CL ⁶ H03G 3/00
[52]	U.S. Cl 381/61; 381/65
	Field of Search 381/61, 64, 65,
	381/63, 98, 106

References Cited

U.S. PATENT DOCUMENTS

1,830,402	11/1931	Miestner.
1,971,469	10/1934	Busmui.
3,789,143	1/1974	Blackmer .
4,096,438	6/1978	Hamphrey .
4,150,253	4/1979	Knoppel .
4.516,192	4/1986	Amston .
4,627,094	12/1986	Scholz .
4,731,852	3/1988	Liljeryd .
5,091,700		Smith .
5.133.015	7/1992	Scholz .
5173.178	12/1992	Kawashing et al.
5.243,660	9/1993	Zagorski .
5,487,114	1/1996	Dinh .

5.596,646 1/1997 Waller, Jr. .

OTHER PUBLICATIONS

Andio, Radio and TV Circuits, LM380, 3 pages. Library of Congress Cataloging-in-Publicata Data, Rashid, M.H., SPICE for circuits and electronics using PSpice/ Muhammad H. Rashid, 5 pages. Properties of Magnetic Disks and Tapes, 1 page. Recording with AC-Bias, p. 472.


Primary Examiner-Potester W. Isen Attorney Agent, or Firm-Barnes & Thomburg


ABSTRACT

The audio process is a signal path having a plurality of filters connected or including distortion means. The prime example of this phenomenon surrounds inductances such as found in magnetic tape recorders, spring reverberators, and transformers. The inductors require a pro-combasis filter to produce a constant current. Secondarily there are the complementary filters associated with the average spectrum of audio which are used to maximize the signal to noise ratio. Ideally the net response of the filters is flat, however, roll-offs at the audio extremes are quite common.

The audio process distortion emulates the distortion of the active devices between the filters such as vacuum tube and magnet non-linearities. Since the distortion devices follow filters, the spectra of distortion is different than the frequency response.

27 Claims, 3 Drawing Sheets

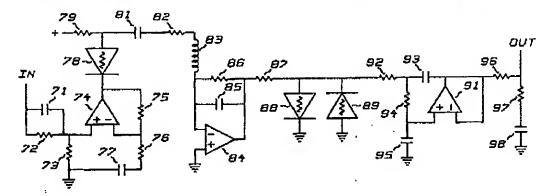



(12) United States Patent Suruga et al.

(10) Patent No.:

US 6,350,943 B1

(45) Date of Patent:

Feb. 26, 2002

(54)	ELECTRIC	INSTRUMENT	AMPLIFIER
------	----------	------------	-----------

(75) laventors: Michio Suruga, Ioagi; Yoshihiro Suzuki, Tama; Kentaro Matsumoto, Kawasaki, all of (PP)

(73) Assignee: Korg, Inc., Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 09/750,861

(22) Filed: Dec. 28, 2000

(56) References Cited

U.S. PATENT DOCUMENTS


5,769,689 A 8/1998 Doidle et al.

Primary Examiner—Staoley J. Witkowski
(74) Attorney, Agent, or Firm—Muramatsu & Associates

(7) ABSTRACT

An electric instrument amplifier emulates an audio characteristics of a traditional vacuum-tube type amplifier. The electric instrument amplifier is formed in a single housing for amplifying an audio signal from an electric instrument. The electric instrument amplifier includes an A/D (analog-to-digital) converter for converting a first analog signal from the electric instrument to a digital signal, a digital signal processing circuit for processing the digital signal to add an intended effect to the digital signal, a D/A (digital-to-analog) converter for converting the digital signal processed by the digital signal processed by the digital signal processing circuit to a second analog signal, a tube amplifier having at least one vacuum-tube for amplifying the second analog signal, and a virtual power circuit formed with semiconductor devices for amplifying or attenuating an audio signal produced by the tube amplifier.

11 Claims, 7 Drawing Sheets

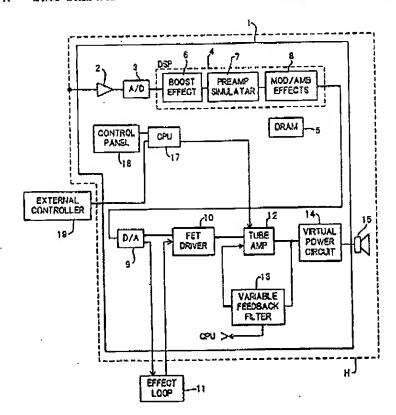

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT:

Memran, Louis I.

EXAMINER: Trost

SERIAL NO:

10/002, 382

ART UNIT: 2683

For:

System for utilizing vacuum tubes in computer audio-circuitry

Filed:

10/20/01

OPINION OF INFRINGEMENT

U.S. Patent and Trademark Office Asst. Commissioner for Petitions Box DAC Washington, DC 20231

Dear Sir:

I, the Applicant's attorney of record, have reviewed the attached articles of AOPEN.COM, Inc. of Taiwan, Republic of China concerning an AX4B-533 vacuum tube and its related motherboard. In or about June, 2002, AOPEN introduced into the United States a chipset which integrated the AX4B-533 tube into a CPU motherboard utilizing an Intel 845E chip. This incorporation of a vacuum tube into such a chipset for was for the purposes of enhancing the audio quality of speakers associated with a personal computer and, as such, falls within the scope of Applicant's Claim I which reads as follows:

"1. A tube card for use with computer audio circuitry comprising: at least one vacuum tube, each said vacuum tube having an input and an output; a DC-to-DC voltage converter supplying high voltage to said vacuum tube; and an analog output signal from a sound input into said at least one vacuum tube, said output of said at least one vacuum tube connected to an external device."

Further, independent Claim 5 of the present application reads as follows:

Pet/Op. of Infr.

"5. A combination tube card for use with computer audio circuitry, comprising: at least one vacuum tube, each said vacuum tube having an input and an output; a DC-to-DC converter supplying high voltage to said vacuum tube; and a sound chip having an analog output, said analog output connected to an input of at least one vacuum tube, said output of said at least one vacuum tube connected to an external device."

The above claims thereby cover the use of the Applicant's technology with reference to both sound cards and sound chips, and also relate to the use thereof within a motherboard of a computer as, for example, is reflected in Claim 6 which reads as follows:

"6. The combination of a tube card for use with computer audio circuitry of claim 5 wherein:

said sound chip having a digital input/output, said digital input/output connected to a motherboard of a computer."

In view of the above, the motherboard offered by AOPEN.COM since June, 2002 falls within the scope of one or more of the claims of the instant application.

Upon information belief, AOPEN.COM not only offers their products on the Internet but, as well, sells through U.S. distributors and has been doing so for several months under the trademark COMPUTUBE.

The undersigned does not know of any patent held by AOPEN.COM or its distributors. Further, given the publication of the instant Application on or about May 2, 2002, it is unlikely that an application for patent directed to the COMPUTUBE could have been filed unless, unknown by the undersigned, the same had already been filed by

such date. In any event, such filing would, in all likelihood, have been well subsequent to the Applicant's domestic priority under Serial No. 60/245, 285, of November 1, 2000.

Respectfully submitted LOUIS I. MEMRAN

Melvin K. Silverman Reg. No. 26,234

Enclosures:

Online print-outs of AOPEN.COM



Global Sites | Home | Corporate | Products | Services | Club AOpen | Resellers | Malls | Site Map

☐ Contact ☐ AOpen Museum

Walcome to AOpen!!

Corporate:





AOpen manufactures computer components as part of the successful \$7 billion Acer grou group has more than 22 years of experience in the PC industry and over 700 patents in Pc technology. Like AOpen, computer components function as part of a whole. To be succes each component must work flawlessly within a broad range of other computer products. Understanding this, AOpen dedicates its engineering expertise to the production of compo of quality, durability, and the utmost flexibility.

From bare systems, motherboards, CD-ROM/CD-RW/DVD drives, and monitors to multim add-on cards, and communication solutions, AOpen products offer the ultimate in perform and compatibility, unmatched by any other PC manufacturer in the world. Above all, to en: highest standard of quality, every AOpen product is manufactured and tested in strict ISO ISO14001 certified facilities, complying with the world's most rigid safety standards.

The "Open" of AOpen reveals a spirit that derives directly from the union of customers and products. The realization of this has been our drive towards Open Architecture products, c Open Mind innovation, and our Open Business partnership with customers and distributor

- Open Business
- Open Mind
- Open Architecture

| Global Sites | Home | Corporate | Products | Services | Club AOpen | Resellers | Malts | Site Map |

Specifications subject to change without notice. We keep refining our products. All products, logos, brand names or companies are trademarks or registored trademarks of their respective companies.


Copyright 2002, AOpen Inc., All rights reserved.

Global Sites | Home | Corporate | Products | Services | Club AOpen | Resellers | Malls | Site Map

Contact C AOpen Museum

Shortcuts

- ► Downloads
- ► Awards & Reviews
- ► Product Registration
- ► ADS Bank
- ► Talent Wanted
- ▶ Where to Buy
- ► FAQs









Headline News



- BOOM
- AOpen Motherboard/Desktop Bluetooth Solution 2002/11/19
- AOpen again leading the industry by releasing affordable entrylevel graphics workstation motherboard - AX4R Plus 2002/11/17
- AOpen breaks sound barrier with exciting new line of multimedia headset/headphone solutions 2002/11/15
- Jukebox FM AOpen dials-in new FM-Radio motherboard
- "SilentTek!"- An innovative noise reduction technology introduced by AOpen, 2002/11/06
- AOpen continues fulfilling its pledge to support RDRAM-based Intel Pentium 4 platform by releasing AX4T-533 Pro motherboard
- AOpen announces new motherboards Tuned & ready for the next generation 2002/10/07
- AOpen announces SOHO-centric full features motherboard MX46 U2 2002/10/02
- ☐ Back to the Future is Free! Free EzRestore/ProMagic software to serve AOpen Motherboard Owners 2002/09/20
- Appen announced AMD K7 AGP 8X motherboard solutions powered by VIA KT400 Chipset and Serial ATA 2002/09/13

More...

Copyright 2002, AOpan Inc., All rights reserved.

http://www.aopen.com/

11/21/2002

11/22/2002

launching the 1GHz Athi screamed; "AMD just br mportant processor clor

awaited mark two days

Search Search

infoSatellite.com - AOpen releases mainboard with vacuum tubes





YOURNAME.COM

FREE WITH ALL HOSTING

special fear

Nvidia launc GeForceFX (expected, Nv yesterday at

based on 0.13-micron s GeForceFX, or NV3x, far thips are the first graph process and should also all 2002 its new GPUs Pentium 4 breaks 3G ship with 1GHz DDR-II

vebsite 20Net published urlicle entitled "Intel rea announcing that Intel h ronically, AMD had read mark On March 7, 200 ,000MHz," Pentium III .GHz mark." The piece igahertz barrier "with

Tablet PCs reported las and evalue

barrier," Read More...

champagne bottle on Ta the official launch of the Tablet PC Editlon, Follow software giant's lead, m manufacturers started to their Tablet PCs, Here w overview of some new ? Microsoft by

AOpen releases mainboard with vacuum tubes

InfoSatellite.com / News

E sections

By Ana Letícia Sigvartsen InfoSatellite.com June 05, 2002

Entertainment

AOpen released yesterday an innovative (and even a little weird at first sight) solution is all turned to the tubes, the chipset is still important, and, in this product. The company is now promoting the world's first vacuum tube motherboard, called AX48-533Tube. Even though the attention in this case, it's the Intel 845E.

■ newsletter ■

Security

Legal

AOpen expalined that the idea didn't come from nowhere modern-day adoption of an idea that was spawned by 533Tube, said the company, "incorporates the novel, the Invention of the electric light bulb by Thomas A. and seems to have solid foundations. The AX4B-

Edison back in 1879 - the vacuum tube.

The reason why AOpen decided to put the tubes in the new solution is allegedly to improve audio capabilities

De-mail this to a

friend 2

C unsubscribe

subscribe

Ċ

Submit

audio technology. The solution can be complemented by retailers with speaker 'passionate audiophiles and extreme gamers," who the systems and the latest CD and DVD playback devices. company expects are interested in having the best in considerably. The company is turning its focus to

combine the warmth and depth - tonal realism, if you will - of the sound produced by kicking around lots of crazy ideas when I proposed it would be really cool if we could A little more about how the idea was born: "We were all together late one night,

理 start page 智

Send

http://www.infosatellite.com/news/2002/06/a050602aopen_tube.html

Hardware

Games

Software Wireless Sci-Tech

InfoSatellite.com - AOpen releases mainboard with vacuum tubes

Page 2 of 3

a look on the features a

prices. Read More ...

a hot topi



E others B

The latest news InfoSatellite Use/Privacy Corrections Top Stories Contact Us website for Advertise **Terms of** Archive Archive on your free! Jobs

manager at AOpen America. "Laughter turned into raves a few months later when we absolutely amazing. It left everyone stunned, What we realized at that moment was an audio tube, with one of our state-of the-art motherboards" said Al Peng, product how the limitations of typical audio output from a PC as we knew it, had come to an end - and what we were pioneering was a way to literally combine the bast of two did our first lab demo of our unique hybrid creation. The reproduced sound was audio worlds - old and new."



two front digital stereo output channels with tube output, resulting in outstanding quality of sound.

Putting aside the tubes, let's 533Tube comes with the 1845E chipset design and specifications: the AX4Bget to the regular

memory channels delivering 2.1 GB/s of memory bandwidth to the processor, being made for the Intel Pentium 4 processor with 533Mhz FSB. It comes with a 4X AGP features DDR SDRAM slots, supports 4 ports of USB 2.0 and Ultra ATA/100 interface. The AX4B-533Tube has an estimated street price of \$215 and fully supports ACPI 1.0 and APM 1.2 specs. It comes bundled with Norton Anti-Virus 2002 software.

(Sources: AOpen)

Related news:

Hew cumulative patch for into! launches faster Cek Intel toadnap shows full One Note will be new Offi Midia launches GeForce intel makes massive laur Lindows faunches Lindow AMD processors face sig NV30 = GeForceFX? reduction

AMD roadmap shows fur AMD, Intel processors ge Pontium 4 breaks 3GHz Opera 7 for Windows Be: AMD launches new mobil Nvidia al Comdox: NV30 both? Microsoft to launch Xbox

国 most rei


Free download - Win XP Windows 1.0 to XP: Scre Crack spils out WinXP at Xbox vs. GameCube - Br Intel forecasts Firewire's Release

http://www.infosatellite.com/news/2002/06/a050602aopen_tube.html









Gigabyte has Radeon 8500XT-based card

unveiled



Page 3 of 3

VIA/S3 Savage XP chip

spotted at Computex

o Asus prepares seven Hammer mainboards Gigabyte has Radeon 8500XT-based card nForce2-based mainboards exposed o VIA, AOpen sued by Mediatek

Nvidia DDR400 chipset spotted at Computex Nvidia supports new Athlon XP 2200+

Microsoft announces new Windows Media support AMD demonstrates AGP 8X on Hammer VIA/S3 Savage XP chip unveiled

0

0

٥

o AOpen releases mainboard with vacuum tubes o Acer shows new XScale handhelds

o ATI R300 might be unveiled this summer o VIA displays fanless Thin PC

o ALi, VIA and their Hammer chipsets

VIA launches new processor and new chipset Itanium 2 servers: Great expectations o

ECS has i845G, GL solutions 0

FAX NO.

954+351+


o AMD shows off Opteron, announces mainboard support

o MSI starts Computex with new mainboards

Nvidia might have 12 new chips up its sleeve

Related links:

AOpen






obal Sites | Home | Corporate | Products | Services | Club AOpen |

Contact AOpen Museum

Chinese (Chine) Motherboard Home Page

Chinese (Taiwan)

Motherboards

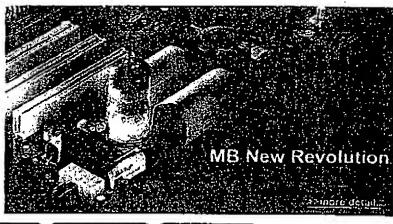

Search Comparison

Motherboards

CPU Socket Memory

DDR Motherboards

Socket 478 SDRAM Motherboards Pentium 4 RDRAM Motherboards

> Socket 423 RDRAM Motherboards

DDR Motherboards Pentium III & Celeron Socket 370

SDRAM Motherboards

DDR Motherboards AMD Athlan/ XP & Duron K7 Socket A SDRAM Motherboards

Others

Motherboard Accessories

Link to Server Solutions

Dual Processor Motherboards

We welcome your suggestion for this motherboard product library. Send them here.

Over-clocking page

| Global Sites | Home | Corporate | Products | Services | Club AOpen | Resollers | Mails | Site Mag |

Specifications subject to change without notice. We keep refining our products.


All products, logos, brand names or companies are trademarks or registered trademarks of their respective companies.

Copyright 2002, AOpen Inc., All rights reserved.

http://www.aopen.com/products/mb/

11/22/2002

Page 1 of 1

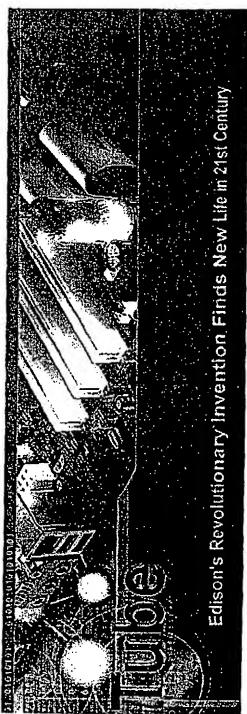


AX48-533 Tube — The new: Motherboard incorporates the novel, modern-day adoption of an idea that was spawned by the invention of the electric light butb by Thomas A. Edison back in 1879—the vacuum tube.

In taking this bold step towards audio perfection, AOpen's hybrid <u>AX4B-533 Tube</u> unquestionably is targeted to a very exclusive niche market - passionate audiophiles and extreme gamers who are interested in building their own ultimate entertaining PCs. The motherboard is also certain to appeal to retailers that desire to cater to these two eccentric groups with custom-built PCs, delivered with matching speaker systems and the latest CD and DVD playback devices.

If you are interested in <u>AX4B-533 Tube</u>, please fill the application form to leave your information. We will provide you the latest news about Tube as soon as possible. To stop all e-mail tube news from AOpen, click this "<u>Unsubscribe</u>" link to unsubscribe it.

Fill De Form Relution to Home Page

AX4B-533 Tube

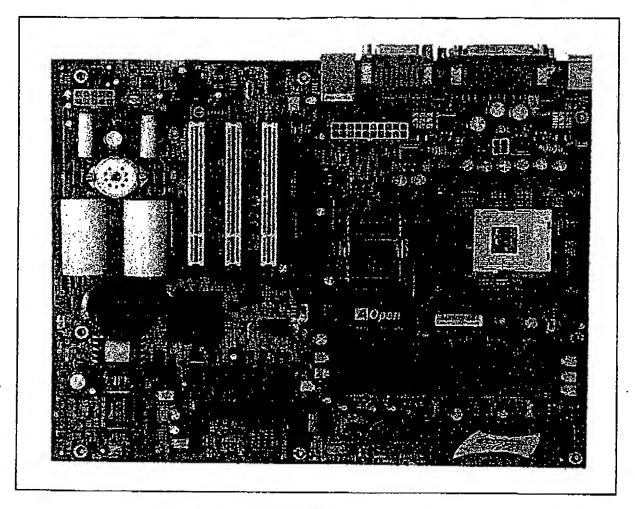

Close View of AX4B-533 Tube Motherboard
Copyright 2000, AOpen Inc., All rights reserved.
Last Updated: 2002/09/21